

CITYSPOT®

MARTI 2,5 M³



SULO®

PREMIUM IN DESIGN AND FUNCTION

Marti 2,5 m³

This solid and puristic metal bank allows the optimal use of the full volume and obstacle-free insertion of large-sized recyclables

- Rounded edges and smooth surfaces without dead spaces guarantee maximum comfort in handling, emptying and maintenance
- Advanced ergonomics due to reduced throw-in-height
- Best ratio size-useable-space thanks to double chains guided by rollers
- Interior can be completely filled, no obstacle for throwing and collecting
- 90° opening flaps mean that emptying is completely friction-free
- The ultimate bank for large recyclables and cardboard
- Large metal surfaces allow full individualisation with stickers
- Marti is the only recycling bank that can be equipped with access control for pay as you throw policy. It's moveability is an advantage in comparison with underground and semi-undergroundsystem




LIFTING DEVICES



Kinshofer

SLOT SYSTEMS*

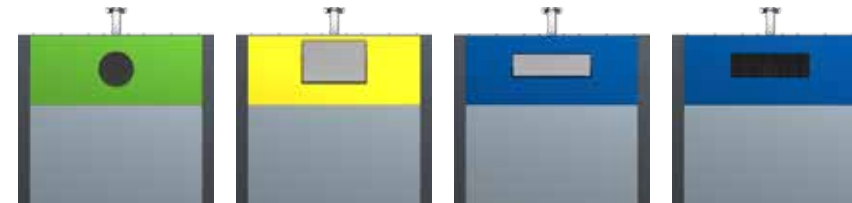


Glass
Yellow Green
RAL 6018

Packaging
Zinc Yellow
RAL 1018

Paper
Signal Blue
RAL 5005

Paper
Signal Blue
RAL 5005

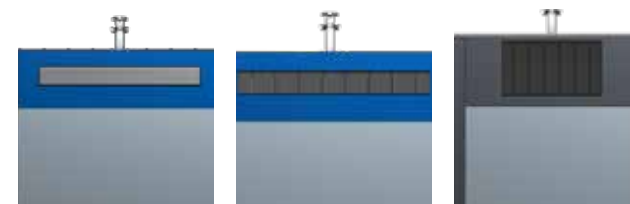

Cardboard
Signal Blue
RAL 5005

Cardboard
Signal Blue
RAL 5005

Residual waste
Slate Grey
RAL 7015



Big user Flap

COLOURS

Front and Back



Silver Grey
RAL 7001

Sides and Tops




Slate Grey
RAL 7015

* All slot Systems on demand

Cityspot®

TECHNICAL SPECIFICATIONS*

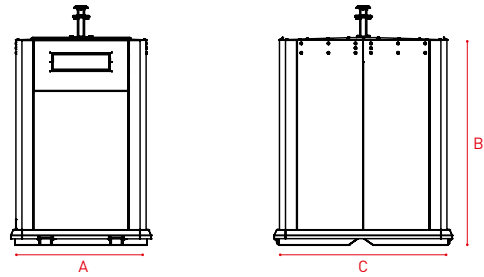

Marti 2,5m³

Dimensions ~ (mm)


- A Width
- B Height
- C Depth

- 1190
- 2028
- 1508

Volumes

- Useful Volumes ~ (m³) 2,35
- Unloaded weight (kg) 250
- Space requirements (m²) 1,79

CENTERING SYSTEM



Facilitate the stations; so banks are always aligned at the same location 100 x 36,7

PERSONALISATION

Front and Rear

Sides and Top



* All Volumes on demand

Cityspot®

TECHNICAL INFORMATION*

MARTI

2,5 m³

TECHNICAL SPECIFICATIONS

Dimensions	Depth: 1508 mm, Width: 1190 mm, Height: 2028 mm
Useful volumes	2,25-2,35 m³
Unloaded weight	230-250 kg
Lifting device	Kinshofer

INSTALLATION

Space requirements	1,79
Transport	18 per truck

HANDLING, COMFORT AND FLEXIBILITY

Accessibility	▪ (glass, packaging, paper)
Sound-proofing	Double skin installation: polyethylene foam + high density polyethylene protection

EMPTYING

Number of operators	1
Duration of emptying	1-2 min
Emptying system according prehension grip	Double flap, vertical

SERVICE

Pay as you throw billing	▪
Access control	▪
Level measurement	▪

FRACTIONS

Regular waste RAL 7015	Flap : 620x305 mm Strap port: 620x330 mm
Paper RAL 5005	Valve : 490x110 mm
Packaging RAL 1018	Valve: 400x230 mm or 620x305 mm
Cardboard RAL 5005	Valve: 600x110 mm
Glass RAL 6018	EPDM flap - Ø200 mm hole
Extended sorting instructions RAL 1018	Valve: 400x230 mm or 620x305 mm
Big user flap	620 x 327 mm

STANDARDS

NF EN 13071

sulo.com

DATA-CITYSPOT-MARTI-2500-EN-1-1-150322