

CITYSPOT®

MARTI 4 M³



SULO®

PREMIUM IN DESIGN AND FUNCTION

Marti 4 m³



-  BILATERAL
-  VERTICAL
-  DISABILITY ACCESS
-  PAY AS YOU THROW
-  ACCESS CONTROL
-  LEVEL MEASUREMENT



This solid and puristic metal bank allows the optimal use of the full volume and obstacle-free insertion of large-sized recyclables


- Rounded edges and smooth surfaces without dead spaces guarantee maximum comfort in handling, emptying and maintenance
- Advanced ergonomics due to reduced throw-in-height
- Best ratio size-useable-space thanks to double chains guided by rollers
- Interior can be completely filled, no obstacle for throwing and collecting
- 90° opening flaps mean that emptying is completely friction-free
- The ultimate bank for large recyclables and cardboard
- Large metal surfaces allow full individualisation with stickers
- Marti is the only recycling bank that can be equipped with access control for pay as you throw policy. It's moveability is an advantage in comparison with underground and semi-undergroundsystem

LIFTING DEVICES




Kinshofer

SLOT SYSTEMS*

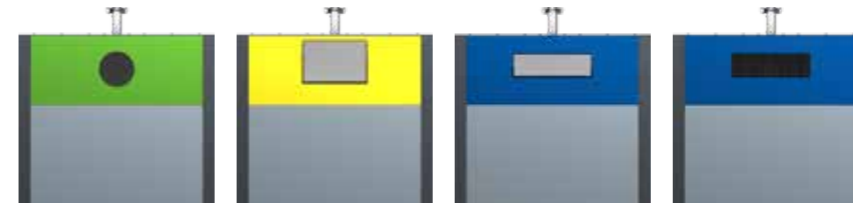

- Glass**
Yellow Green
RAL 6018
- Packaging**
Zinc Yellow
RAL 1018
- Paper**
Signal Blue
RAL 5005
- Paper**
Signal Blue
RAL 5005

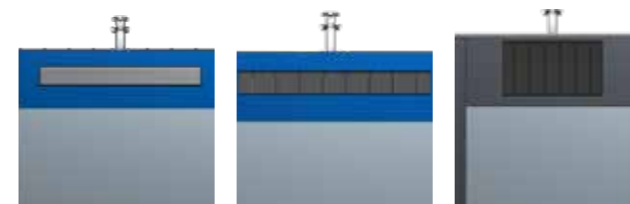



- Cardboard**
Signal Blue
RAL 5005
- Cardboard**
Signal Blue
RAL 5005
- Residual waste**
Slate Grey
RAL 7015



Big user Flap


COLOURS

- Front and Back**

Silver Grey
RAL 7001
- Sides and Tops**

Slate Grey
RAL 7015

* All slot Systems on demand

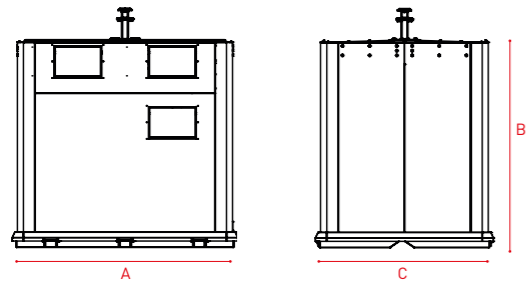Cityspot®


TECHNICAL SPECIFICATIONS*



Marti 4m³

Dimensions ~ (mm)		Volumes	
A Width	1911	Useful Volumes ~ (m ³)	3,88
B Height	2028	Unloaded weight (kg)	370
C Depth	1508	Space requirements (m ²)	2,88

CENTERING SYSTEM



Facilitate the stations; so banks are always aligned at the same location 100 x 36,7

PERSONALISATION

Front and Rear Sides and Top



* All Volumes on demand

Cityspot®

TECHNICAL INFORMATION*

TECHNICAL SPECIFICATIONS	
Dimensions	Depth: 1508 mm, Width: 1190 mm, Height: 2028 mm
Useful volumes	3,62-3,88 m ³
Unloaded weight	361-370 kg
Lifting device	Kinshofer
INSTALLATION	
Space requirements	2,19
Transport	9 per truck
HANDLING, COMFORT AND FLEXIBILITY	
Accesibility	▪
Sound-proofing	Double skin installation: polyethylene foam + high density polyethylene protection
EMPTYING	
Number of operators	1
Duration of emptying	1-2 min
Emptying system according prehension grip	Double flap, vertical
SERVICE	
Pay as you throw billing	▪
Access control	▪
Level measurement	▪
FRACTIONS	
Regular waste RAL 7015	Flap : 620x305 mm Strap port: 620x330 mm
Paper RAL 5005	Valve : 490x110 mm
Packaging RAL 1018	Valve: 400x230 mm or 620x305 mm
Cardboard RAL 5005	Valve: 1 200x110 mm Cardboard strap openings: 1 200x110 mm or 1 530x110 mm
Glass RAL 6018	EPDM flap - Ø200 mm hole
Big user flap	620 x 327 mm
STANDARDS	
	NF EN 13071

sulo.com

DATA-CITYSPOT-MARTI-4000-EN-1-1-140322

SULO®