


ICEBERG®

MAX3



SULO®

Premium design enriches every surrounding
ICEBERG® MAX3

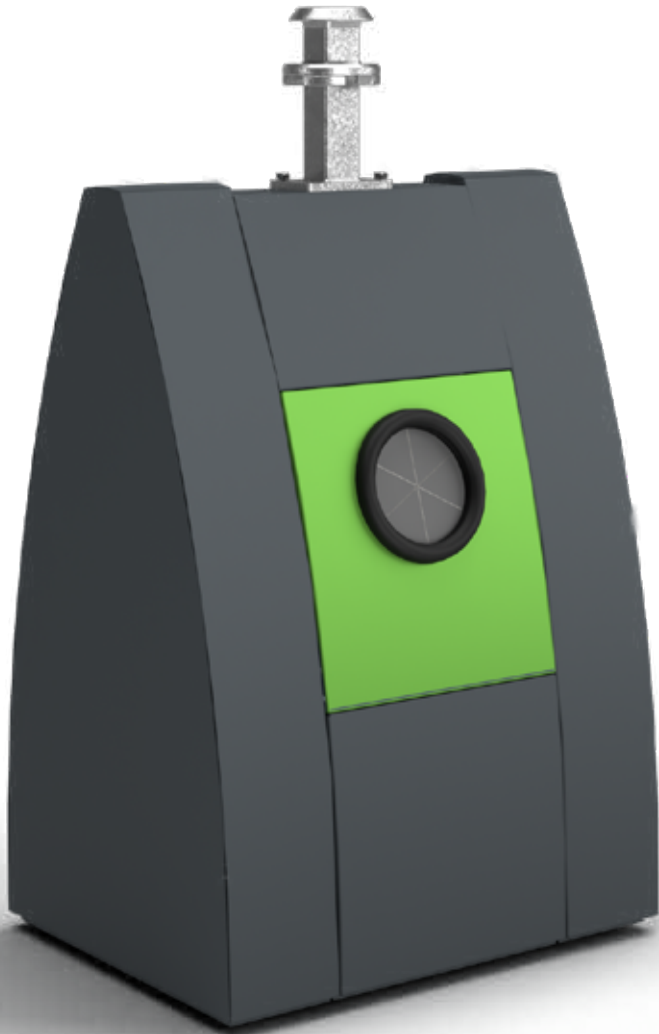

VERTICAL



DISABILITY ACCESS



+OPTION
ACCESS CONTROL
For the filling chute 80 L



+OPTION
FILL LEVEL MEASUREMENT

Simple design, proven a thousand times

The **ICEBERG® MAX3** deposit system is part of the everyday streetscape in densely populated countries like the Netherlands. The well-conceived design has proven itself in practice. Its purist lines let the **ICEBERG® MAX3** be seamlessly integrated into every urban environment. Since nothing protrudes unnecessarily and the lifting system remains covered, vandalism doesn't have much of a chance against the **ICEBERG® MAX3**. It's not an exaggeration to say the **ICEBERG® MAX3** is a recognised member of the urban community and, with a wealth of options like the heavy usage flap, provides all the equipment elements necessary for efficiently collecting and sorting waste without odours as appropriate for contemporary times.

LIFTING DEVICE

- 1-Hook

PILLAR

- Dimensions
W 800 mm D 700 mm H 1.105 mm
- Steel paint in anthracite grey matt RAL 7016

INSPECTION DOOR

- At the rear
- Rectangular: 400 x 820 mm
- Locked by double bit captive key



FRACTION LABELLING

- Lightgreen RAL 6032

SLOT SYSTEM

- Glass, throw-in width 200 mm

POSITION

- Centralized on the pedestrian platform

LIFTING DEVICES



1-Hook



2-Hooks




Glass, throw-in width 200 mm



Sorting extension 250 x 395 mm



Regular Waste Filling chute 80 / 110 L




Packaging, Paper - Rectangular slot 200 x 400 mm

SLOT SYSTEMS

FOOT PEDAL



Kinshofer Flex 60 x 60 x 3 mm



Big user flap 380 x 360 mm on the front



Foot pedal for regular waste filling chute 110 L Width 670 mm

FINISH

Pillar

- Smooth-painted steel
- Smooth-painted 304 stainless steel
- Brushed-finish 304 stainless steel

COLOURS

Front panel - fraction labelling



Glas RAL 6018



Packaging RAL 1018



Paper RAL 5017

CUSTOMIZATION



Writing




Sorting instructions

Other colours available on request. The RAL colour values are given as an indication only and may vary depending on production.

Quality First

SULO ICEBERG® NOVUM

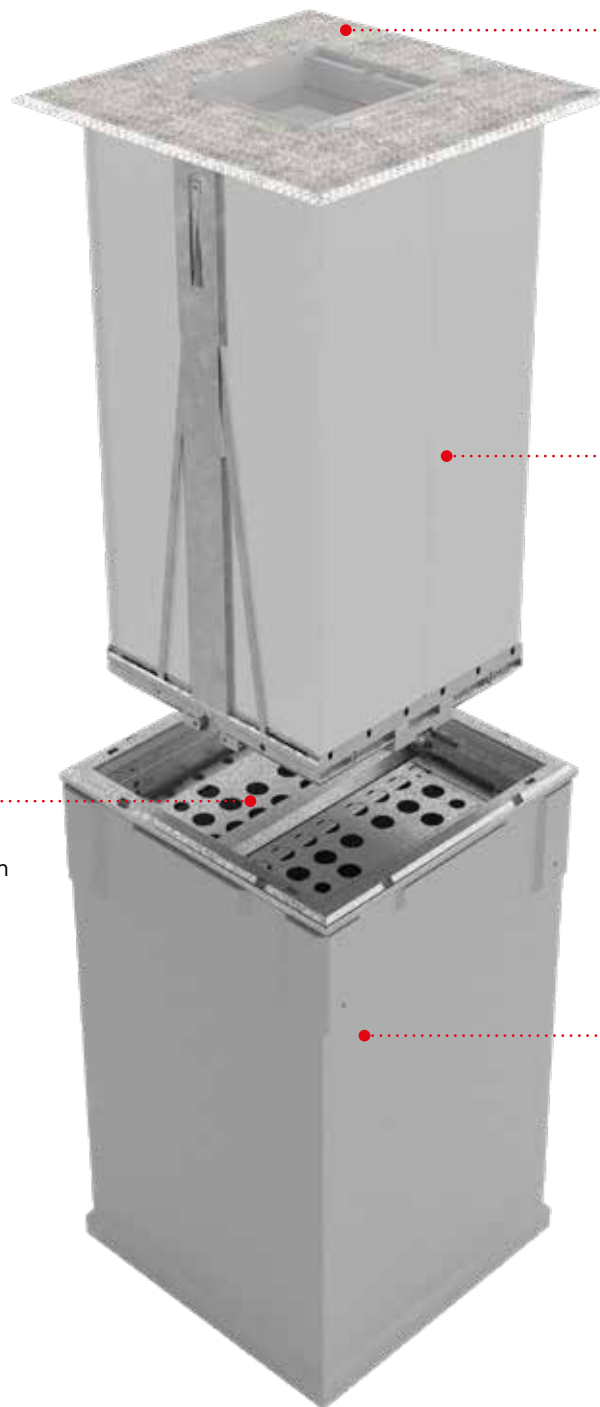

PEDESTRIAN PLATFORM

- Surface-mounted with or without recess
- Flush-Mounted with or without recess

INNER CONTAINER

- Yoke system placed outside the tank to facilitate throwing and waste collection
- 3, 4 or 5 m³ riveted
- Soundproofing for glass

SAFETY MECHANISM

- SECUROFLAP system
- Load capacity in compliance with EN 13071 standard
- Easy maintenance
- 2 hatches locked by hooks at the top, the hooks can only be unlocked when the inner container is in place

CONCRETE CONTAINER

- 4 m³: 1.725 x 1.725 x 2.495 mm
- 5 m³: 1.725 x 1.725 x 2.915 mm
- Monolithically, cast in one piece, water resistant
- Optional with buoyancy protection

CONCRETE CONTAINER

- 4 m³: 1.725 x 1.725 x 2.495 mm
- 5 m³: 1.725 x 1.725 x 2.915 mm
- Monolithically, cast in one piece, water resistant
- Optional with buoyancy protection

4 m³5 m³

SECUROFLAP

SAFETY MECHANISM

- SECUROFLAP system
- Load capacity in compliance with EN 13071 standard
- Easy maintenance
- 2 hatches locked by hooks at the top, the hooks can only be unlocked when the inner container is in place

The benefits of our concrete container

- Seamless positioning of the underground systems possible
- Due to the depressions in the concrete crowns, the surface water can run off better when the concrete tanks are placed next to each other
- 4 pump sumps: For easier pumping of water out of the concrete container
- Made of 100% waterproof concrete
- Quality: C45/55
- If the groundwater level is too high, the concrete container is also available with buoyancy protection



Quality First

SULO ICEBERG® NOVUM



INNER CONTAINER

- Volume: 3 m³, 4 m³ und 5 m³
- Dimensions:
 - 3 m³ H 1.691 x P 1.342 x L 1.342 mm
 - 4 m³ H 2.251 x P 1.342 x L 1.342 mm
 - 5 m³ H 2.811 x P 1.342 x L 1.342 mm
- Container emptying hatch with a juice retention capacity of 2% of the container volume, regardless of collection flow.
- No obstacle, no hindrance to dropping and collecting waste, thanks to the yoke-system placed on the outside



OPENING SYSTEM

- With Kinshofer flex: perfect control of flap opening beyond 90°.
- With single flap: manual opening by hook above the collection truck beyond 90°.



1-Flap



2-Flap



PEDESTRIAN PLATFORM

SURFACE-MOUNTED

- Platform rests on the ground
- **Standard version:** easy-to-clean, non-slip bulb plate
- **Optional:** pavement platform with recess, this can be provided with rubber inlay for fall and noise protection or with paving stones for discreet integration into the street scenery

FLUSH-MOUNTED

- Platform is integrated flush with the floor, thus no trip hazard
- **Standard version:** easy to clean, non-slip bulb plate, rainwater runs off well due to 1.5° crowning
- **Optional:** pavement platform with recess, this can be provided with rubber inlay for fall and noise protection or with paving stones for discreet integration into the street scene



Quality First

SULO ICEBERG® NOVUM

	Glass Ø200	Packaging, Paper - Slot 200 x 400	Sorting extension 250 x 395	Regular Waste - Filling chute Trappe 110l	Regular Waste Filling chute 110l Foot pedal
PILLAR STRUCTURE					
Frame 1	■	■			
Frame 2	■	■	■	■	
Frame 3					■
FINISHING LOOK					
Smooth-painted steel	■	■	■	■	■
Smooth-painted 304 stainless steel	■	■	■	■	■
Brushed-finish 304 stainless steel	■	■	■	■	■
LIFTING DEVICES					
1-Hook	■	■	■	■	■
Kinshofer	■	■	■	■	■
2-Hooks	■	■	■	■	■
Snn adaptation	■	■	■	■	■
LOCK FOR INSPECTION DOOR					
Triangular key	■	■	■	■	■
Half-moon key	■	■	■	■	■
Double square key	■	■	■	■	■
Flat key	■	■	■	■	■
Key triangle cylinder lock	■	■	■	■	■
Location of the lock	lower part	lower part	lower part	lower part	lower part
Location of the inspection door lock	rear	rear	rear	rear	rear
OPTIONS					
Anti-graffiti paint	■	■	■	■	■
Front-mounted large user flap	■	■			
Predisposition for access control				■	
Access control				■	
Foot pedal					■

SULO ICEBERG®
NOVUM

CONCRETE CONTAINER

Volume (m³)	4	5
Width (mm)	1.725	1.725
Depth (mm)	1.725	1.725
Height (mm)	2.425	2.940
Buoyancy protection	■	■
Weight (kg)	4.250	5.000

SAFETY DEVICE

Securoflap	■	■
------------	---	---

INNER CONTAINER

Volume (m³)	3	4	5
Useful load (m³)	3,2	4	4,7
Width (mm)	1.342	1.342	1.342
Depth (mm)	1.342	1.342	1.342
Height (mm)	1.691	2.251	2.811
Weight (< kg)	<605	<635	<665

Assembling riveted at the top and bolted at the bottom

Material Steel

Sound proofing ■

Fill level measurement ■

PEDESTRIAN PLATFORM

Bulb plate 30° surface-mounted ■

Bulb plate 90° flush-mounted ■

Recess 30° surface-mounted ■

Recess 90° flush-mounted ■

Rubber slab (with recess only) Black 10 or 30 mm

Nudge ■

COLLECTION

Number of operators 1 1 1

Duration of emptying 2/3 min 2/3 min 2/3 min

Pay-as-you-throw ■ ■ ■

Normes NF EN 13071 NF EN 13071 NF EN 13071

